

## PRODUCT FEATURES

- Available in 316 polished stainless steel
- LED colour options available
- Two directional light output
- Low voltage 2.5W LED
- Easy to install and virtually maintenance free
- Minimal heat output, low running costs
- Long life expectancy (7 10 years)
- IP67 weatherproof rating
- Available in 6 way and 10 way kits, which includes; flex, enclosure and driver
- Also suited for lighting footpaths and patios














# **SPECIFICATIONS**

### CHARACTERISTICS

Material	316 Grade Stainless Steel
Dimensions	195mm x 24mm x 80mm (W x H x D)
Operating Temperature	-30°C to +60°C (Installed and Operated Within Multiple Climates from Around the Globe)
IP Rating	IP67
Compliances	BS7671 Wiring Regulations BS EN 61439-2:2011 BS EN 61439-5:2015 CE Certified Low Voltage Directive 2014/35/EU Electromagnetic Directive 2014/30/EU
Typical Weight (AVG)	650g



#### LIGHTING

Туре	Low Voltage LED Two Directional
Rating	2.5W


#### DRIV/FR

Material	Fully Isolated Plastic Case
Dimensions	35mm x 25mm x 110mm (W x H x D)
DC Voltage	24V
Current Range	O-0.63A
Rated Max. Power	15.12W

### LED COLOUR OPTIONS

ACLG0290A	White & White (approx. 3000K - warm white)
ACLG0290	White & White (approx. 5700K - white)
ACLG0270	Blue & White (approx. 5700K - white)
ACLG0280	Green & White (approx. 5700K - white)

### 6 WAY LED COMBI DECK LIGHTING KIT DIAGRAM (NTS)

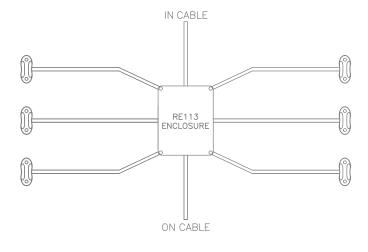

Please Note: A fixture with an IP rating of 65 is protected against multi-directional, low-pressure water, like rain and sea spray. It is not suitable for high pressurised water, ie pressure washers.

Images are for marketing purposes only and are not contractual  $\ensuremath{@}$  2019



Rolec Services Ltd Ralphs Lane, Frampton West Boston, Lincolnshire UK. PE20 1QU





