



NEW
Contactless
payment
options

ROLECEV

QUANTUM

Intelligent EV charging pedestal



Manufactured
in the UK

QUANTUM

Intelligent EV charging pedestal

The QUANTUM EV charging pedestal is a sophisticated and resilient EV charging point, providing a combination of durability and impeccable design for all locations. This charger's integrated LED amenity lighting also provides greater visibility of the charging bays and surrounding areas.

This future-proof pedestal effortlessly integrates with any chosen OCPP back-office management system, delivering an ideal plug-and-charge or pay-to-charge solution. EV drivers can enjoy a hassle-free charging experience, initiated via app, contactless payment, or RFID card/fob.

Feature-rich, this EV charger supports dynamic load balancing and is equipped with PME fault detection, so there is no requirement for an earth rod, reducing installation costs.

Available in 1way, 2way or 4way versions, providing up to 22kW superfast charging.



Product features

- Plug & charge, app, contactless payment (model dependant), or RFID controlled charging
- Choose from 1x, 2x or 4x universal charging socket(s)
- Up to 7.4kW or 22kW charging output(s)
- PME fault detection (no earth rod required)
- Supports dynamic load balancing & static load management
- OCPP 1.6 compliant (can integrate with any back-office)
- Over-the-air firmware / software updates
- Built-in AC overload & fault current protection (RCBO)
- Built-in 6mA DC leakage protection
- Dual tamper and breach security notifications
- Lockable front access door (model dependant*)
- Optional 7" LCD Screen
- Cable lock security feature (can be permanently locked by user)
- LED amenity lighting head (Photocell controlled)
- MID-approved energy metering
- 4G / Wi-Fi / Ethernet connectivity
- IK10 impact resistant design
- Surface or roof mountable

Powered by
MONTA

Other preferred back-office and mobile app partners:

Fuuse

wattif

ChargePlace Scotland
electric vehicle charging



*Included as standard on contactless models, available as an optional upgrade on other models QUAD001



OCPP 1.6 compliant

Ability to integrate with any OCPP compliant back-office management system and app.



Easy to operate

Four quick and easy ways to operate: contactless, mobile app, RFID cards and fobs or plug & charge.



Eligible for grant funding

This range is approved for grant funding. For more information visit: rolecserv.com/ozev-grant-funding



4G / Wi-Fi / Ethernet enabled

Complete with secure 4G, Wi-Fi and Ethernet connectivity, ensuring chargers are always online 24/7.



Branding & colour options available

Rolec offers a bespoke chargepoint branding service; from logos & brand colours, to vinyl wraps.



No earth rod required

Equipped with built-in TruePEN PME fault detection, saving installation time and costs.

The details

UP TO 22KW

Available in both single phase and three phase models, providing up to 22kW superfast charging.

QUANTUM is compatible with all EVs & PHEVs, charging at the fastest speed possible, ensuring vehicles are ready to go in no time.

GO CONTACTLESS

Perfect for public EV charging points, the QUANTUM pedestal with integrated contactless payment terminal offers EV drivers a hassle-free tap-and-charge experience. Simply use your debit or credit card, Apple Pay, Google Pay, and more - no user app or registration required.



ACCURATE BILLING

Built-in MID-approved energy metering ensures accurate consumption reporting, which is essential for businesses and residential car parks, wishing to bill for their usage. Use our back-office management platform to generate revenue by setting your own tariffs.

SAFE AND SECURE

Rest assured, Rolec's entire EV chargepoint range is fully UK Smart Charge Point Regulation compliant.

Over-the-air updates allow the chargers to receive the very latest features, ensuring a safe and future-proof product 24/7.

3 YEAR WARRANTY

Rolec EV chargepoints are designed, developed and manufactured in the UK and come with a 3 year warranty included as standard, for added peace of mind on your investment.

Specifications


Product Overview:

	Connection Type	Charging Output	Input Supply	Unit Colour	Product Code
Single Phase Units	1x Type 2 (IEC 62196) charging socket	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0411B
				● Grey	ROLEC0411G
				○ White	ROLEC0411W
	2x Type 2 (IEC 62196) charging sockets	Up to 7.4kW (32A) per socket	1x 63A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0421B
				● Grey	ROLEC0421G
				○ White	ROLEC0421W
4x Type 2 (IEC 62196) charging sockets	Up to 7.4kW (32A) per socket	2x 63A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0425B	
			● Grey	ROLEC0425G	
			○ White	ROLEC0425W	
Three Phase Units	1x Type 2 (IEC 62196) charging socket	Up to 22kW (32A)	1x 32A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC0413B
				● Grey	ROLEC0413G
				○ White	ROLEC0413W
	2x Type 2 (IEC 62196) charging sockets	Up to 22kW (32A) per socket	1x 63A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC0423B
				● Grey	ROLEC0423G
				○ White	ROLEC0423W
NEW	QUANTUM – Including Contactless Payment Terminal:				
Single Phase Units	1x Type 2 (IEC 62196) charging socket	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC1411B
	2x Type 2 (IEC 62196) charging sockets	Up to 7.4kW (32A) per socket	1x 63A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC1421B
Three Phase Units	1x Type 2 (IEC 62196) charging socket	Up to 22kW (32A)	1x 32A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC1413B
	2x Type 2 (IEC 62196) charging sockets	Up to 22kW (32A) per socket	1x 63A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC1423B


Specifications

Unit Dimensions:


Quantum 1way/2way unit:

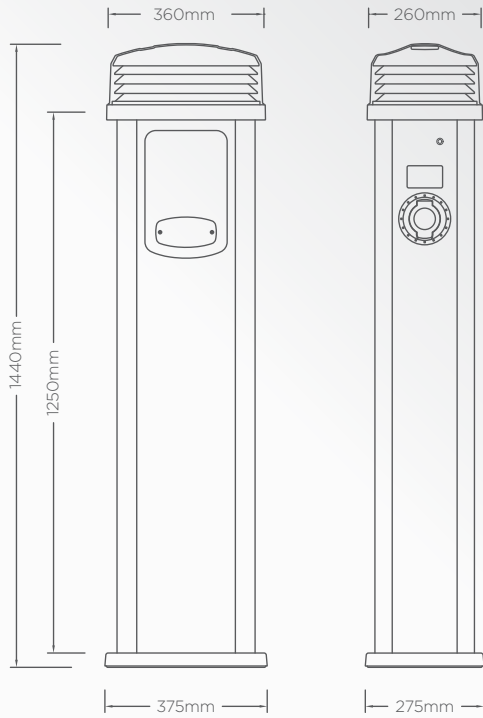


Quantum 4way unit:

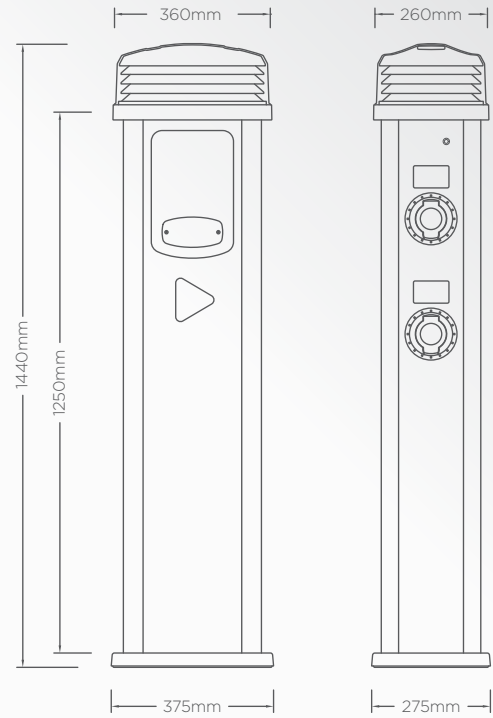

Quantum 1way/2way Contactless Payment unit:

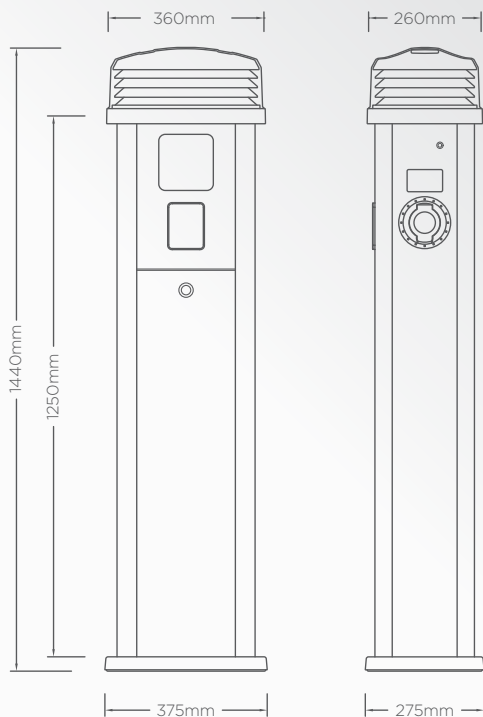

Ground mounting base:

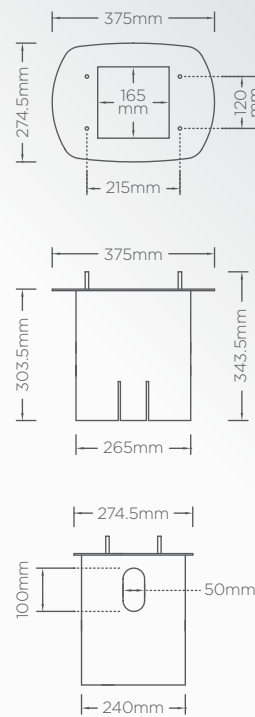

Specifications

Technical Data:

User Interface	<ul style="list-style-type: none"> • Mobile app • Contactless card payment terminal (EMVCo. L1 v3.0 Certified) (model dependant) <ul style="list-style-type: none"> • RFID reader (ISO14443 A & B (T=CL), Desfire EV2/3 & Mifare Classic protocols) • NFC (ISO18092) • RFID reader(s) (MIFARE ISO/IEC 14443 A) (model dependant) • Plug & charge • RGB LED status indicator halo(s) – configurable
Charge Protocol	Mode 3 (IEC 61851-1)
Protection	<ul style="list-style-type: none"> • AC overload & fault current protection – 40A 30mA Type A RCBO (per socket) • DC fault protection – 6mA • Lightning surge, over temperature protection • PME fault detection – No earth electrode/rod required • Supports automatic dynamic load balancing (may require additional hardware) • Supports static load management (software configurable)
Cable Terminals	<ul style="list-style-type: none"> • Single Phase – 3x 50mm 1P + N + E • 2x [3x 50mm] for ROLECO425B, ROLECO425G, ROLECO425W. Alternative cable terminals available upon request) • Three Phase – 5x 50mm 3P + N + E
Communications	<ul style="list-style-type: none"> • 4G LTE Cat-1 (built-in nano SIM(s), subscription required) <ul style="list-style-type: none"> • LTE FDD: B1/B3/B5/B7/B8/B20/B28 • GSM: B2/B3/B5/B8 • Wi-Fi 802.11 b/g/n 2.4 GHz (2412-2472 MHz / 2422-2462 MHz) • NFC 13.56 MHz • RJ45 Ethernet connection (2x connections for ROLECO425B, ROLECO425G, ROLECO425W) • Bluetooth Low Energy (BLE 4.1) 2402-2480 MHz (for installer configuration purposes) • OCPP 1.6J • Cyber security – Data encryption level TLS 1.2
Energy Metering	Integrated Class 1 MID compliant metering
Amenity Lighting	<ul style="list-style-type: none"> • 360° Low energy LED • Rating – 1 x GX53 9W LED, 230-240V AC • Colour temperature – 4000K • Protection – 6A 30mA Type A RCBO
Standby Power Consumption	<ul style="list-style-type: none"> • Charging circuits – < 7.5W (per socket) • Panel heater – 8W • Lighting – 9W
Dimensions	375mm x 1440mm x 275mm (W x H x D)
Weight	< 32kg (model dependant)
Environmental	<ul style="list-style-type: none"> • Ingress protection – Enclosure IP66, Socket IP54 • Impact protection – IK10 • Security – Dual tamper and breach notifications • Operating temperature – -30°C to +50°C • Operating humidity – 5% to 95%
Materials	<ul style="list-style-type: none"> • Substructure – 2.5mm 6063 extruded Aluminium, 25 micron hard anodised protective finish • Panel – 3.2mm Aluminium composite • Door - Body – Heavy duty 1.5mm Steel applied with 45-55 microns of Zinc primer (where fitted) • Door - Finish – Corrosive resistant, textured Polyester powder coating (where fitted) • Lens – High impact resistant 3mm Polycarbonate • Base – High impact resistant, heavy-duty 5mm Polycarbonate • Lid/collar/louvres – High impact resistant Polycarbonate
Unit Colour	 Black Grey White Other colours available upon request
Certifications & Compliances	<ul style="list-style-type: none"> • EV Charging Compliance – EN 61851-1:2019, EN 61851-22:2002 • Smart Charge Points – (SI 2021/1467) • Wiring Regulations – BS 7671:2018+A2:2022 • EMC Compliance – EN 61000-6-3:2007+A1:2011, EN 61000-6-2:2005, 2014/30 /EU, SI 2016/1091, (EN 301 489-1 V1.9.2, EN 301 489-3 V2.1.1, EN 301 489-17 V1.3.1, EN 301 489-19 V2.1.1, EN 301 489-52 v1.1.0)^P • Safety Compliance (LVD) – EN 62368-1:2014, 2014/35/EU, SI 2016/1101, EN 60950-22:2006^P • Communications / RED – EN 62311:2008, 2014/53/EU, SI 2017/1206, EN 300 330 V2.1.1 (2017-02), EN 301 908-1 V15.1.1 (2021-09), EN 301 908-13 V13.2.1 (2022-02), EN 301 511 V12.5.1 (2017-03), EN 300 328 V2.2.2 (2019-07), EN 300 440 V2.2.1 (2018-07), (EN 301 908-2 V13.1.1, EN 303 413 V1.1.1)^P • Environmental Protection – BS EN 60529:1992+A2:2013 • Impact Rating – BS EN 62262:2002+A1:2021 • Metering – 2014/32/EU, SI 2016/1153 • RoHS – 2011/65/EU, SI 2012/3032 • REACH – 1907/2006, REACH etc. (Amendment) Regulations 2021 • Payter Payment Device - CE, FCC, RoHS, WEEE , REACH, EMVCo, PCI-PTS 6.x, TQM, MasterCard, VISA, American Express, Discover, Diners ^P • Certifications – CE & UKCA
Warranty	3 years

Options & accessories

Product Code	Item Description
RFID0010	RFID card
RFID0020	RFID fob
GMQR0010	Ground mounting base for Quantum pedestal
QUAD0001	Front access door upgrade with RFID - Black
EVCB0020	Root mount protection barrier - 48mm
EVCB0040	Surface mount protection barrier - 48mm
EVPS0010	EV parking sign - A4 landscape (Other sizes are available)
EVPP0100	5m 32A Type 2 to Type 2 charging cable
EVPP0107	10m 32A Type 2 to Type 2 charging cable
EVPP0105	5m 32A Three phase Type 2 to Type 2 charging cable
EVPP0108	10m 32A Three phase Type 2 to Type 2 charging cable (Other cables are available, including Type 1 options)
ACSR0125	100A up to 35mm ² screened CT clamp with 10m cable



QUAD0001



RFID0020



EVPS0010



EVCB0040



GMQR0010



EVPP0100



Branding & colour options available















Rolec offer a bespoke chargepoint branding service; from logos & brand colours, to vinyl wraps. This can be arranged at time of order. Contact Rolec for details.

Brand names, logos and trademarks used herein remain the property of their respective owners. This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.




Chargepoint management



Monta's chargepoint management platform provides businesses and organisations with the ability to deploy and self-manage their very own electric vehicle charging network. Ideal for workplace, fleet, commercial and residential locations.

-  Full & automated control of your chargepoints
-  Unlock additional revenue streams
-  Set chargepoints for public and/or private use
-  Set different pricing for individual chargepoints & groups
-  Dynamic pricing allows operators to set pricing in line with their hour-by-hour energy cost
-  Fully scalable solution; add or remove chargepoints & users
-  Complete fleet management solutions with analytical feedback & reporting
-  Reduce charging costs and CO₂ with Smart Charge feature
-  Vehicle integration provides visibility of battery size, SOC, percentage & location etc.
-  Automatically reimburse employees' home charging
-  Smart queuing system that sends notifications to drivers when they become available
-  Over-the-air updates and self-healing algorithms ensure charger stability & availability
-  Static, Dynamic or True Dynamic load balancing options
-  EV Roaming feature, allowing chargepoints to be available on other apps

Other preferred back-office partners:

+ many more





Charge point settings
Set charge point to public

Private Public

Reserve charge point
Book charge points at a time that suits you the best!


Reserve

Easy payment for your employees

▶ For more information about Monta's chargepoint management solutions and pricing, see the Powered by Monta Overview Sheet

Chargepoint operation

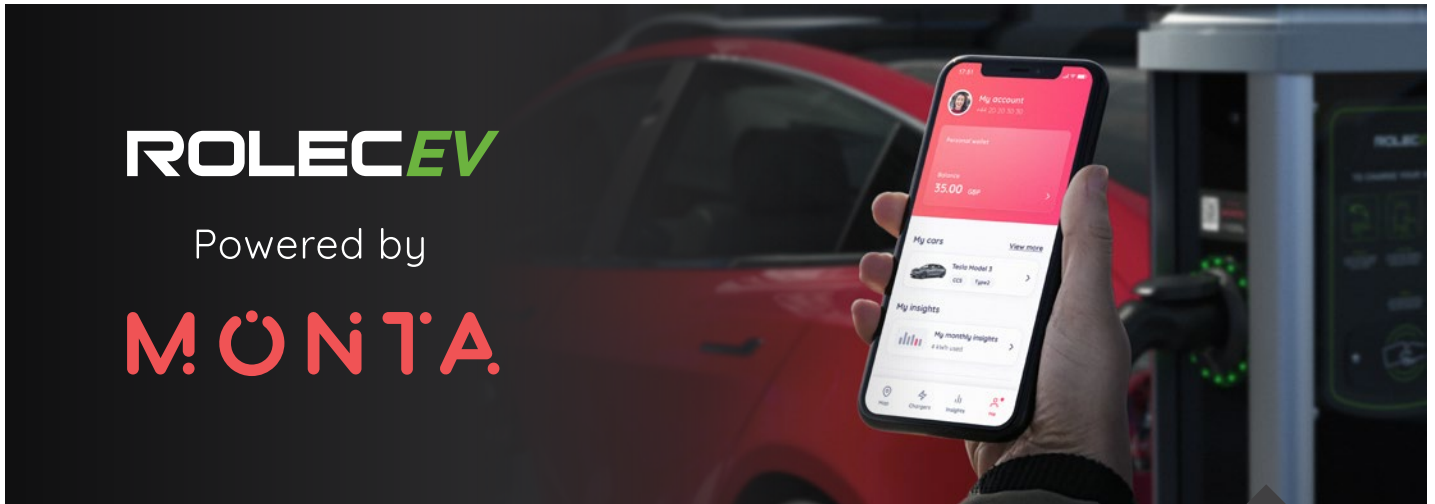

Charge your EV on your terms. With Monta you have full control over your charging experience, at home or on the road.

- Easily locate and navigate using the chargepoint map
- Remotely control your home EV charging
- Choose your ready time and choose to prioritise lower costs, lower CO₂ or only using renewable energy
- Schedule charges so your car is ready when you are
- Integrate with most EV manufacturer apps and cars
- Real-time information on your car and battery levels to maximize your charging experience
- Share and give charging access to friends, family and guests
- Set your home charger for public use with custom pricing
- Access to over 550,000 public chargepoints across Europe
- Easily initiate charging and complete payments via credit card, Apple Pay, Google Pay or Monta Wallet
- 24/7 online chat or email support for help when you need it most

The Monta app is 100% free with no subscription cost when charging at home

Other preferred mobile app partners:

- Fuuse
- wattif
- ChargePlace Scotland electric vehicle charging
- ev.energy



DOWNLOAD THE APP



RFID activation

Great for quick activation, RFID cards or key fobs are easily accessible and add for a much simpler charging experience, which can also be used alongside the mobile app.



▶ For more details about the Monta solution for EV drivers and the Monta app, please visit www.monta.com/uk/home-charging



THIS DOCUMENT CONTAINS INFORMATION THAT IS SUBJECT TO CHANGE WITHOUT NOTICE.

The latest version of this publication can be downloaded at <https://www.rolecserv.com/downloads-ev-charging>

Illustrations of the product and user interface are for marketing purposes only.

Brand names, logos and trademarks used herein remain the property of their respective owners. This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.

© 2024 by Rolec Services Ltd. All rights reserved.

EVQD-V02-R1 Quantum Data Sheet



Manufactured
in the UK

ROLECEV

t: 01205 724754

e: enquiries@rolecserv.co.uk

www.rolecserv.com

